


KORAFLEX Optimal FKO



Въведени филтри

Топлинна мощност: t_1 : 75 °C | t_2 : 65 °C | t_i : 20 °C | Δt : 50 °C

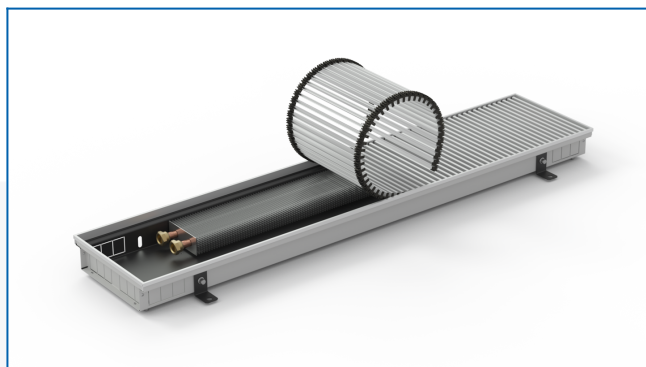